


PLAN VIEW

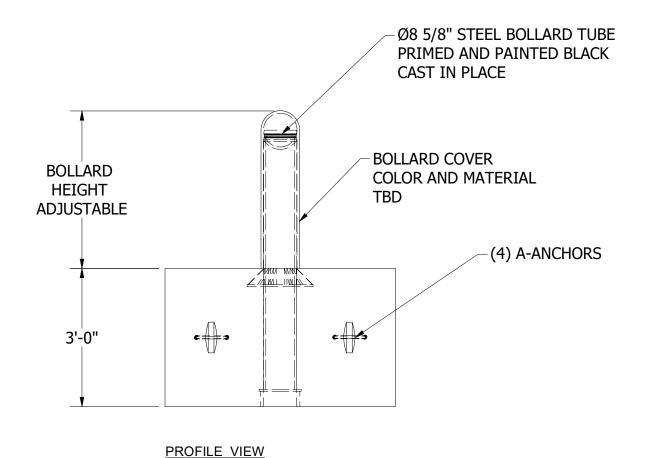


PART INFORMATION DESCRIPTION APPROX. WEIGHT IN LBS BP-1 BASE 5,500 8 5/8 OD STEEL BOLLARD TUBE N/A AND COVER

## NOTES: UNLESS OTHER WISE SPECIFIED 1. CONCRETE SHALL HAVE A MINIMUM


COMPRESSIVE STRENGTH Fc=5000 PSI

AT 28 DAYS.
2. THE PORTLAND CEMENT USED IN THE PRECAST SECTIONS

SHALL MEET THE REQUIREMENTS OF
TYPE II/V HIGH SULFATE RESISTANCE CEMENT IN ACCORDANCE WITH ASTM C-150.



ISOMETRIC VIEW

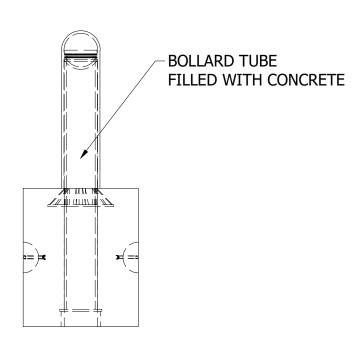

**END VIEW** 

DO NOT SCALE



SET AND POUR 1 BOLLARD BASE

W.TACK

8/15/2023

1 OF 1